













technical specification...

Description		Graphic Pattern Tufted 80/20 Carpet	
	Dimensions	3.66m & 4m	
	Total Thickness	8mm ± 10%	
	Pile Height	5.5mm ± 0mm/-0.5mm	
	Collection Size	Infinite colour and combinations	
	Application	EN 1307	Class 33, suitable for general commercial applications
	Pile Composition	80%Wool 20% Polyamide	
	Dye Method	Hank Dyed	
	Tufted Construction	1 1/8th Gauge	
	Total Weight	5,000 gsm ± 10%	
	Primary Backing	Polypropylene	
	Secondary Backing	Polypropylene	
	Castor Chair Use	EN 985	Minimum RValue: ≥2.4
	Light Fastness	EN ISO 105 B02	≤4-5
	Dimensional Stability	EN986	≤0.2%
	Environmental	Materials used are chosen for their low volatile organic compounds. Carpet is manufactured using sustainable processes. The process used ensures wool is sourced and processed with minimal risk to the environment. Efficiencies in the production facilities follows the 4 R's Re-duce, Re-cover, Re-cycle, Re-use, thereby decreasing the amount of waste material which would otherwise be sent to landfill.	
	Actiguard	Actiguard for ultimate freshness and protection	
	Dust Mite Treatment	Dust mite treatment is applied to reduce the risk of allergens	
	Moth Proof	Moth Guard eliminates the risks associated with the moth larvae in woollen products	
	Guarantee	80/20 wool sheet products are guaranteed for 7 years under general contract use	
	Installation Method	Broadloom directional either direct stick, underlay and gripper or double stick Durafit.	
	Reaction to Fire	EN 13501-1	C _f -s1
	Slip Resistance	EN 13893	DS:≥0.30
	Electrical Resistance	BS ISO 10965 & EN 1815	< 1 x 10 ⁹ Ω: Static dissipative. Body voltage: Pass (<2kV)
	IMO Resolution W A653(16)	Available on request Smoke and Toxicity Test - IMO Resolution MSC 61 (67) Annex 1 Part 2 and Annex 2 Surface Flammability Test-IMO Resolution MSC 61(67) Annex 1 Parts and Annex 2	

special dye service




unlimited colours

We are proud of our extensive colourbank which we consider to be second to none. However, we are aware that there will always be occasions where you want a particular or exact colour that is not within the standard colour bank.

We are able to match to any colour which you require and control the whole process.

Special dyes must meet your approval before full production is started.

Minimum order requirement 80m². Quantity of 40m² required per colour component.

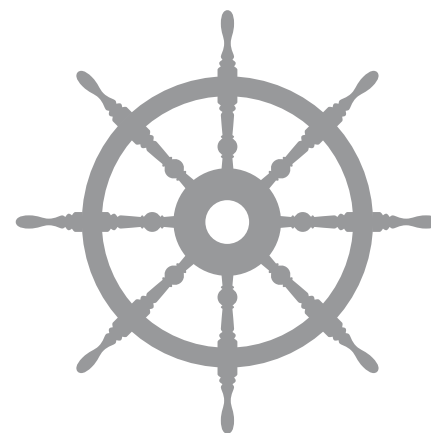

033817



Made in the UK